


Customer approval :

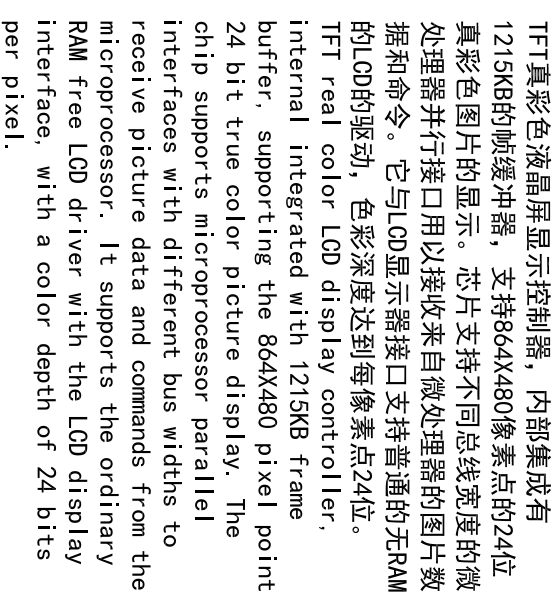

Specification:

- 1) . Driving:TFT, Dots:800*480, VDD:3.3V, 100MA
- 2) . Viewing Direction:6 O'clock
- 3) . Display mode:Normally White, Transmissive
- 4) . Operating temp.: -10。 C~+60。 C
Storage temp.: -20。 C~+70。 C
- 5) . Controller IC: SSD1963
- 6) . Backlight: White, BLA-BLK=3.3V, 200MA 350CD
- 7) . Dimensions with mark "*" are important,
with mark "()" are referenced
- 8) . All the raw materials are RoHS compliant

CON1

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
NAME	VSS	VDD	NC	/WR	/RD	/CS	RS	/RST	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7
PIN	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
NAME	NC	NC	NC	NC	NC	NC	NC	NC	BLA	BLK						

8BITS

NAME	DB8	DB9	DB10	DB11	DB12	DB13	DB14	DB15	BLK	TP-MS0	TP-MS1	TP-MS2	TP-MS3	TP-MS4	TP-MS5	TP-MS6	TP-MS7	TP-MS8	TP-MS9	TP-MS10	TP-MS11	TP-MS12	TP-MS13	TP-MS14	TP-MS15	TP-MS16
PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16										
NAME	VSS	VDD	NC	/MR	/RD	/CS	RS	/RST	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7										
PIN	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32										

16BITS

+RTP

REV	REVISION RECORD	DATE	 深圳市三元晶科技有限公司 Shenzhen TCC LCD Hi-Tech Co., Ltd			
A0	First Issue	04/09				
			MODEL NO.	SYC800480B070V20	GENERAL TOL.	± 0.3
			APPROVED BY	CHECKED BY	DRAWING BY	PAGE ¹ OF 1
			PROJECTION			UNIT: mm
						77