


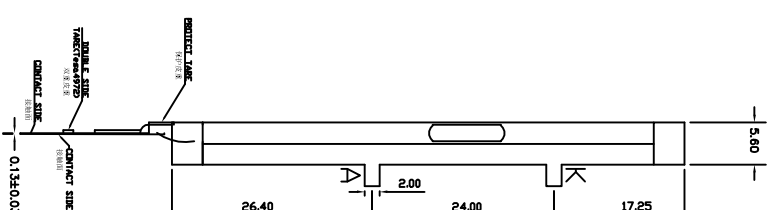


Customer approval :

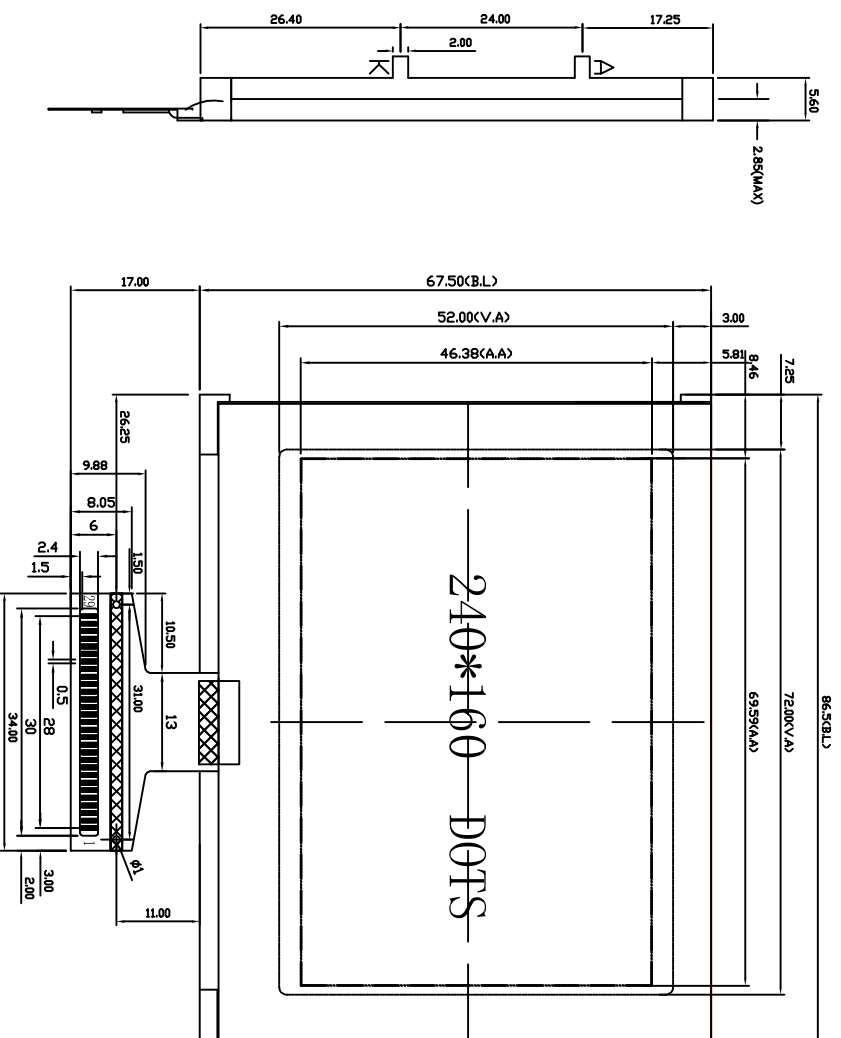

Specification:

- 1). Driving: Duty: 1/160, Bias: 1/13, VLCD: 15.0V(Ref), VDD: 3.3V
- 2). Viewing Direction: 12:00
- 3). Display mode: FSTN/Negative/Transflective
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). Controller IC: UC1611S
- 6). Backlight: Edge Amber, VLED=5.0V, ILED=1150mA
- 7). Dimensions with mark "*" are important, with mark "(" are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9	10
SYMBOL	VB0+	VB1-	VB0-	VA0+	VA1-	VA0-	VLCD	VDD		
PIN	11	12	13	14	15	16	17	18	19	20
SYMBOL	VSS	TST4	BM0	BM1	WR0	CD	CS0	RST	DO	
PIN	21	22	23	24	25	26	27	28	29	
SYMBOL	D1	D2	D3	D4	D5	D6	D7	D13	D15	

REV	REVISION RECORD	DATE	OTCC 深圳市三元晶科技有限公司 ShenZhen TTC LCD Hi-Tech Co., Ltd				GENERAL TOL: ± 0.3		
A0	First issue	11/20	MODEL NO.	SYG240160J-3C31KL6	PAGE:	1	OF	1	UNIT: mm
			模组型号		PROJECTION	三角法			
			APPROVED BY	Francis					
			CHECKED BY	Luoxian					
			DRAWING BY						
			Liu	2015/08/11					
			Francis	2015/08/11					
			Luoxian	2015/08/11					