
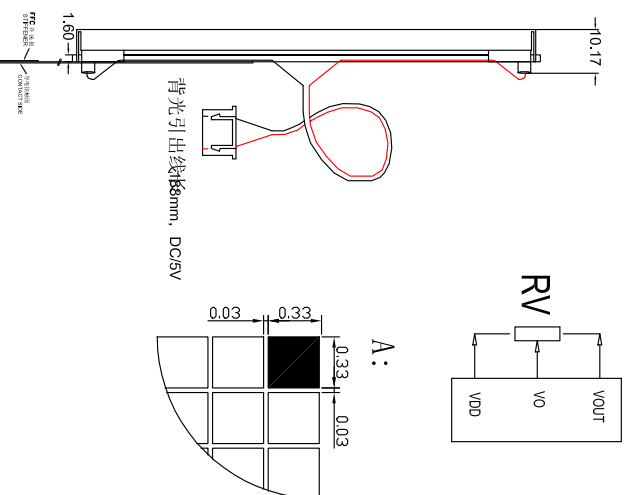


Customer approval :

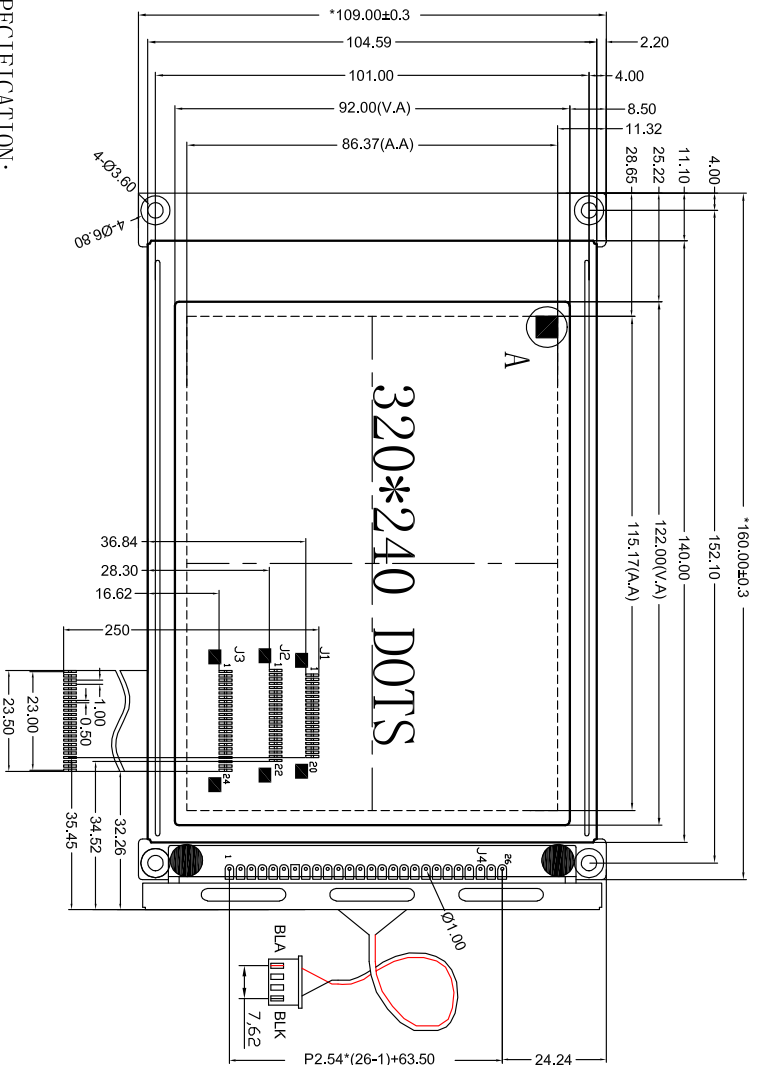

SPECIFICATION:

- 1). Driving: Duty:1/240, Bias:1/17, Vout:-21. 5V, Vo:-18. 5V, Vdd: 5V
- 2). Viewing Direction: 6 0° Clock
- 3). Display mode: STN/Negative/Transmissive/Blue
- 4). Operating temp. :-20° C~+70° C
Storage temp. :-30° C~+80° C
- 5). Control IC: SID13700 + TSC2046
- 6). Backlight Type: White 5V 160ma
- 7). Dimensions With Mark "*" Are Important
With Mark "()" Are Referenced
- 8). All the raw materials are RoHS compliant

接口选择使用, FPC, TP选择使用

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
J14	GND	VCC	VO	A0	WR	RD	D00	D01	D02	D03	D04	D05	D06	D07	CS	RES	VOUT	BLA	DC/5V	CS	DN	DOU1	PN1	BLSTV	IN3
J13	RES	RD	WR	CS	A0	D00	D01	D02	D03	D04	D05	D06	D07	VCC	GND	VOUT	VO	DC/5V	DN1	CS	PN1	IN3	NC	NC	NC
J12	GND	VCC	VO	A0	WR	RD	D00	D01	D02	D03	D04	D05	D06	D07	CS	RES	VOUT	SELT	TOP	LEFT	Bottom	RIGHT			
J11	GND	VCC	VO	WR	RD	CS	A0	RES	D00	D01	D02	D03	D04	D05	D06	D07	BLA	VOUT	NC	NC					

REV	REVISION RECORD	DATE	MODEL NO.	APPROVED BY	CHECKED BY	DRAWING BY	GENERAL TOL:
A0	First Issue	03/15	SYM820240B3V20-6C15BLN1R88		Francis	LAN	± 0.3
			深圳市三元晶科技有限公司				
			Shenzhen TCC LCD Hi-Tech Co., Ltd.				

MODEL NO.	APPROVED BY	CHECKED BY	DRAWING BY	PAGE: 1 OF 1	UNIT: mm
SYM820240B3V20-6C15BLN1R88		Francis	LAN	1	mm
		2013.03.15	2013.03.15	三	角
				法	