




Customer approval :

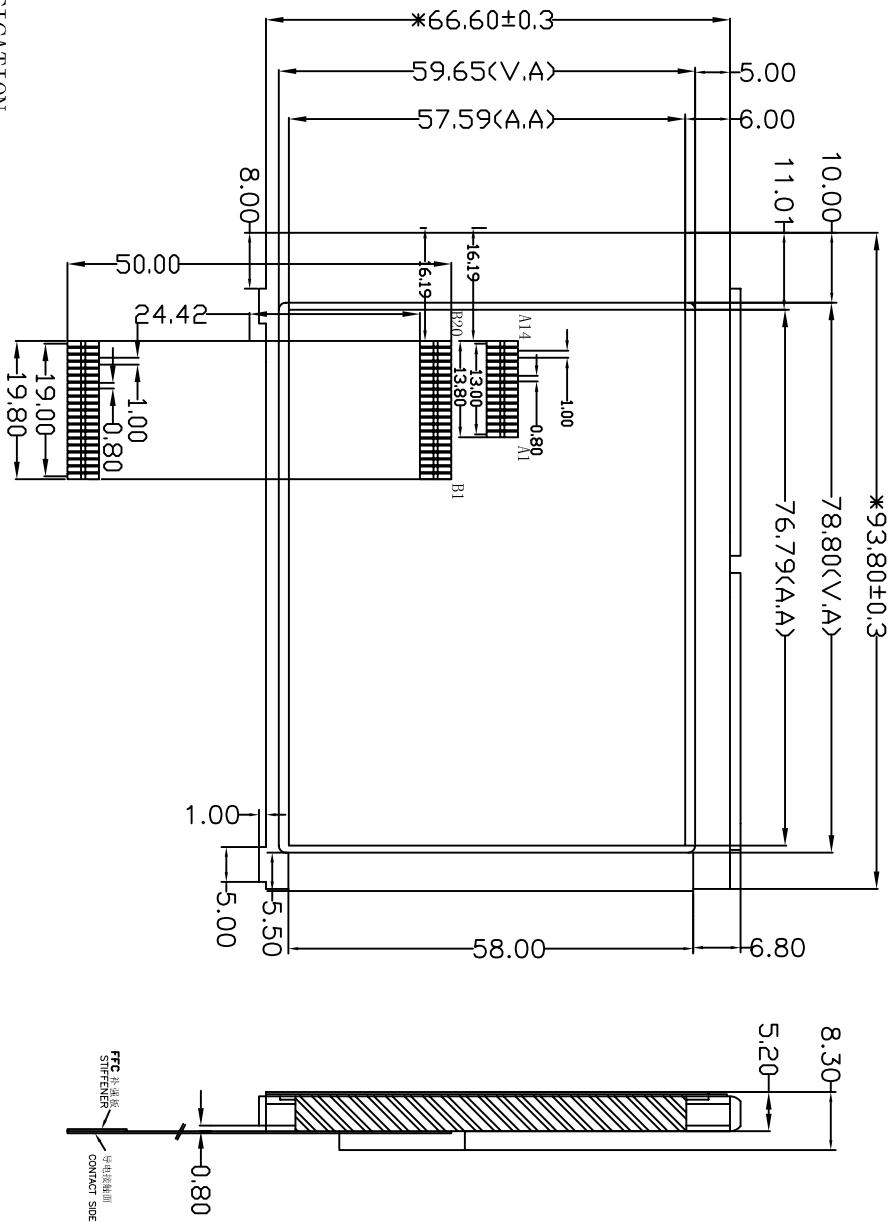

SPECIFICATION:

- 1). Driving:Dots:320\*240 Duty:1/240, Bias:1/17, V0:22.6V, VDD:5V
- 2). VIEWING DIRECTION: 6 O'CLOCK
- 3). Display mode: FSTN/Transflective/Positive
- 4). Operating temp.: -20° C~+70° C  
Storage temp.: -30° C~+80° C
- 5). Control IC: RA8835AP3N
- 6). BACKLIGHT Type: White
- 7). DIMENSIONS WITH MARK "\*" ARE IMPORTANT  
WITH MARK "()" ARE REFERENCED
- 8). All the raw materials are RoHS compliant

A		B	
1	VDD	1	GND
2	VSS	2	VDD
3	VO	3	NC
4	FL	4	VO
5	NC	5	WR
6	HP	6	RD
7	CP	7	DB0
8	D0	8	DB1
9	D1	9	DB2
10	D2	10	DB3
11	D3	11	DB4
12	D4	12	DB5
13	DISP	13	DB6
14	BK	14	DB7
		15	/CS
		16	/RST
		17	V0
		18	SEL
		19	B/A
		20	BK

REV	REVISION RECORD	DATE
A0	First issue	04/10


**深圳市三元晶科技有限公司**  
 ShenZhen TCC LCD Hi-Tech Co., Ltd.

MODEL NO.	APPROVED BY	CHECKED BY	DRAWING BY	PROJECTION
SYT320240FV10				三角法
模 组 型 号				
LAN				

GENERAL TOL:  $\pm 0.3$   
 未注公差  
 PAGE: 1 OF 1  
 页 面

UNT: mm  
 单 位