


Customer approval :

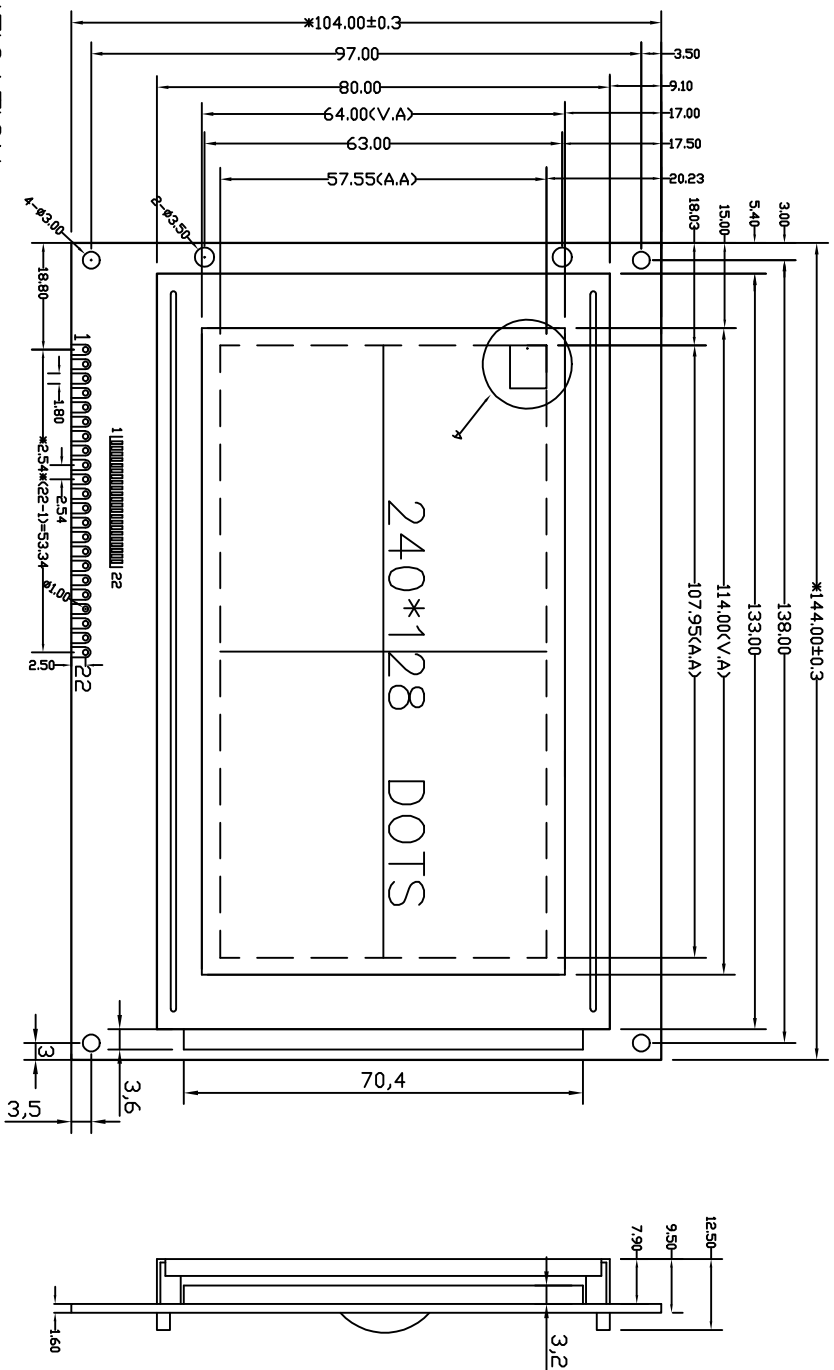

**SPECIFICATION:**

- 1). Driving: Dost: 240\*128, DUTY: 1/128, BIAS: 1/12, VDD: 5.0V, VOUT: -14.5V, VO: -12.5V
- 2). Viewing angle: 6 O'CLOCK
- 3). Display mode: STN, Yellow\_green; STN Blue; FSTN
- 4). Operating temp: -20°C~+70°C  
Storage temp: -30°C~+80°C
- 5). Controller IC: T6963C, COB
- 6). Backlight: White, Vf: 5.0, Vf: 90MA
- 7). Dimensions with mark "\*" are important, with mark "( )" are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9	10 ~ 17	18	19	20	21	22
CONNECTION	FG	GND	VDD	VO	WR	RD	CE	C/D	RES	DB0~DB7	FS	VOUT	BLA	BLK	NC

REV	REVISION RECORD	DATE	TCOC			深圳市三元晶科技有限公司 ShenZhen TCCLCD Hi-Tech Co., Ltd.		
A	FIRST ISSUE	2012/01/30	MODEL NO.	SYB240128AV21	CHECKED BY	Francis	DRAWING BY	Luoxian
B			模组型号		审核	Liu		
C			APPROVED BY		检查	Francis		
D			2012/01/30					

GENERAL TOL: ±0.3

PAGE: 1 OF 1  
PROJECTION: 三角法

